



TANK MOUNTED STRAINER - TMS

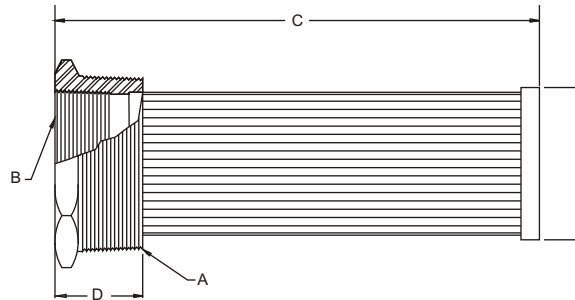

- TANK MOUNTED REUSABLE STRAINER
- SIDE WALL OR TANK TOP MOUNTING
- FLOWS TO 200 GPM (800 LPM)
- STAINLESS STEEL PLEATED MEDIA
- 100 MESH (149 MICRON) STANDARD
- M.S. / C.I. BUSHING



Series	NUT	Bushing Size Dim. A x Dim. B N.P.T	LPM / GPM Rating	Screen Area SQ. IN.	C	D	E	A / F	WT KGS
TMS - 003	MS	3/4" x 3/8"	12 / 3	30	101.6	25	20	30	0.13
TMS - 005	MS	1" x 1 / 2"	20 / 5	55	137.0	28	28	38	0.20
TMS - 010	MS	1 - 1 / 4" x 3 / 4"	40 / 10	90	190.0	31	36	46	0.35
TMS - 015	MS	1 - 1 / 2" x 1"	60 / 15	110	210.0	33	42	50	0.41
TMS - 025	CI	2" x 1 - 1 / 4"	100 / 25	175	254.0	33	54	66	0.62
TMS - 030	CI	3" x 1 - 1 / 4"	120 / 30	265	260.0	43	78	66	1.12
TMS - 040	CI	3" x 1 - 1 / 2"	160 / 40	265	260.0	43	78	66	1.12
TMS - 050	CI	3" x 2"	200 / 50	265	260.0	43	78	82	1.12
TMS - 060	CI	3" x 2 - 1/2"	240 / 60	265	260.0	51	78	90	1.25
TMS - 075	CI	4" x 2 - 1/2"	300 / 75	300	246.0	46	96	118	2.10
TMS - 100	CI	4" x 3"	400 / 100	355	287.0	46	96	118	1.75
TMS - 200	AL	6" x 4"	800 / 200	860	316.0	58	145	144	2.67

MODEL CODE : ASSEMBLY

TMS	- 005		- 149	- RB3
SERIES	SIZE	NPT THD NORMS STD THD 'A' THD 'B'	μ MICRONS	OPTIONAL
TMS	003	06N 03N	149 - SS 100 MESH STD 125 - SS 120 MESH 100 - SS 150 MESH 074 - SS 200 MESH 063 - SS 250 MESH Also - 30 / 60 MESH (OMIT IF STD).	RB3 3 P.S.I. BYPASS VALVE (OMIT IF NOT REQD.)
	005	08N 04N		
	010	10N 06N		
	015	12N 08N		
	025	16N 10N		
	030	24N 10N		
	040	24N 12N		
	050	24N 16N		
	060	24N 20N		
	075	32N 20N		
	100	32N 24N		
	200	48N 32N		

Recommended Weld Flange

To Be Ordered
Separately

TWF - 06N

TWF - 08N

TWF - 10N

TWF - 12N

TWF - 16N

TWF - 24N

TWF - 24N

TWF - 24N

TWF - 24N

CONTACT FACTORY FOR OPTIONAL FEATURE